



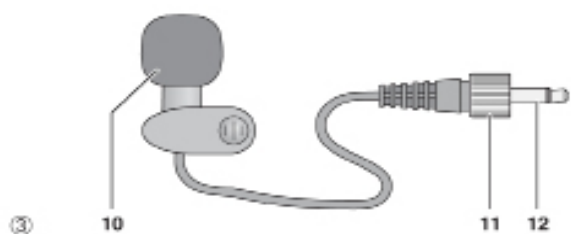

- 1,000 selectable UHF frequencies (672.000-696.975 MHz), can be synchronised with the receivers TXS-606, TXS-626 or TXS-646 via ACT function
- Continuously adjustable sensitivity.
- LCD for group/channel, audio level and battery status.
- Tie clip microphone with latchable 3.5 mm plug.
- Belt clip.
- Power supply via 2 x 1.5 V battery AA size (not supplied).

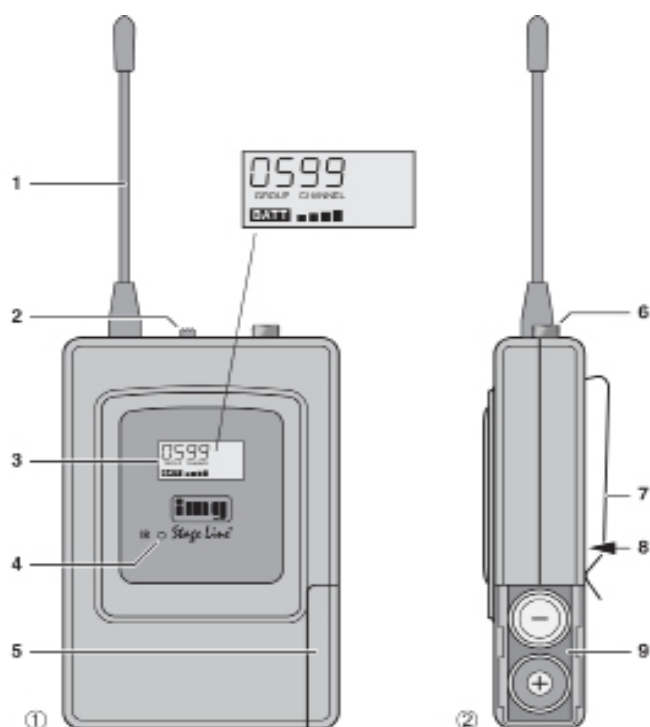

TECHNICAL DATA

- Carrier frequency: 672.000-696.975 MHz
- Transmitting power: 25 mW
- Audio frequency range: 30-18,000 Hz, ±3 dB
- Frequency stability: ±0.005 %
- Operating time: > 8 h
- Dimensions: 61x106x27 mm
- Weight: 125 g